

FRONTSIDE OUTPUT 580 WATT



SOVA SOLAR
ENERGISING THE FUTURE...

Upto 25% more output with Rear side

NEW TECHNOLOGY WITH DUAL GLASS BIFACIAL MODULES

Positive power tolerance upto +4.99 Wp

APPLICATION

- On-grid system
- BIPV
- Solar Farms
- Standalone (off-grid)
- Systems
- Battery charging
- Solar Water Pumping

Key Features



Module power increases 5-25% & LCOE reduces significantly
Bifacial module



Less power loss by minimizing **Shading** effect



16BB **Technology** for better current conduction & improves Module output




Longer **Life** power yield




Excellent performance at low **Light** Condition



Sustain heavy snow **Load** (5400pa) & wind **Load** (2400pa)

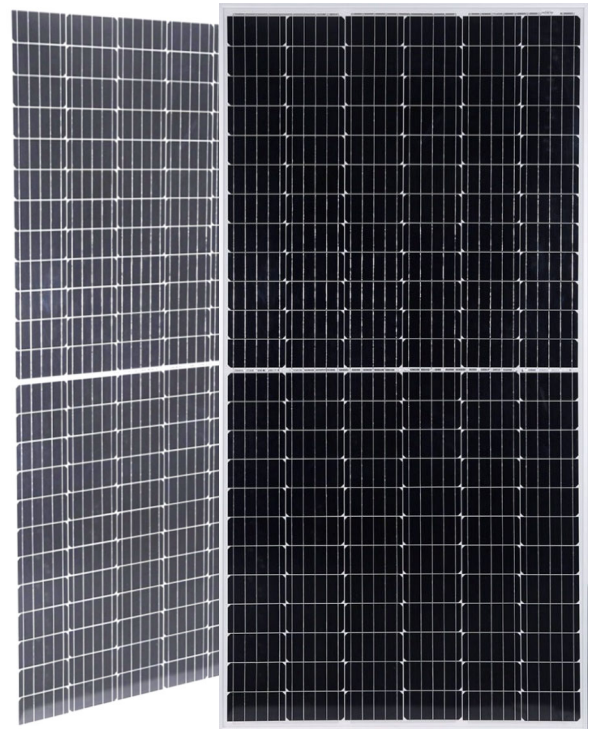

LINEAR PERFORMANCE WARRANTY

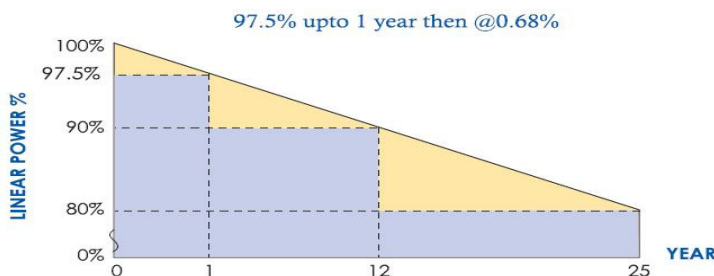

12 Year Product Warranty

25 Year Linear Power Warranty


0.68 % Annual Degradation Over 25 years

MECHANICAL CHARACTERISTICS

Cell Type	N type TOPCON Technology
No. of cells	144 (6*24)
Dimensions	2277 x 1133 x 30 ± 1 mm
Weight	31 kg
Front Side	2 mm ARC Semi tempered Glass
Back Side	2 mm semi tempered Glass
Frame	Anodized Aluminium Alloy
Mounting Hole (Oblong)	7*10 & 9*14 ± 1mm
Mounting Hole CTC distance – vertical	1400, 1100, 400 ± 1mm
Mounting Hole from corner	438.5, 588.5, 938.5 ± 1mm
Mounting Hole CTC distance- horizontal	1087 ± 1mm
Junction Box	IP68 Rated
Output Cables	+350 mm, -350 mm

OPERATING PARAMETERS

Max. System Voltage	DC 1500V
Operating Temperature	-40°C ~ +85°C
Max. Fuse Rated Current	30A
Front Static Load	5400Pa(112lb/ft ²)
Back Static Load	2400Pa(50lb/ft ²)
Bifaciality	80%±10%

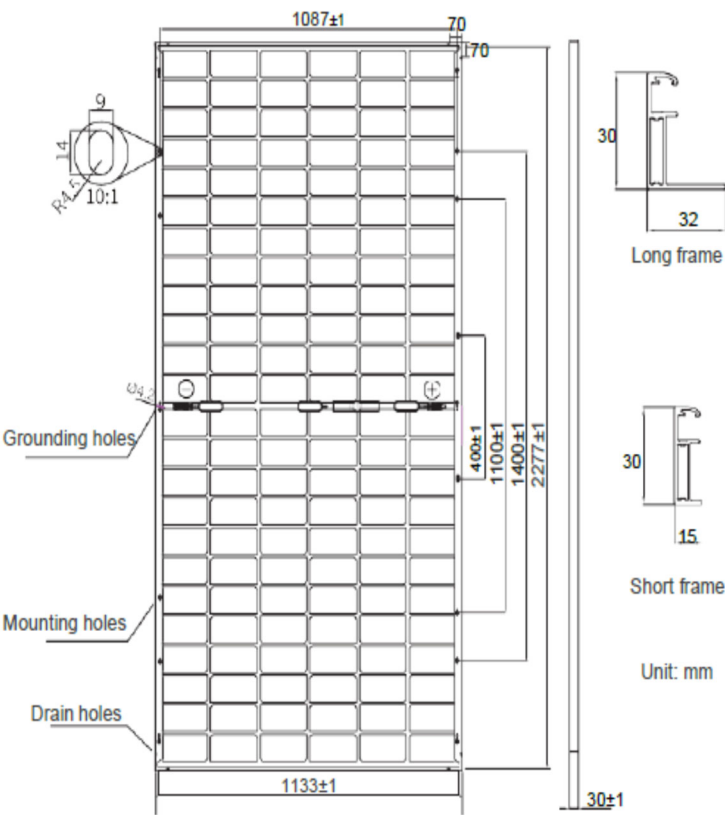

ELECTRICAL CHARACTERISTICS

Module Type	SS580144HCGT
Maximum Power at STC (Pmax)	580
Optimum Operating Voltage (Vmp)	42.59
Optimum Operating Current (Imp)	13.62
Open Circuit Voltage (Voc)	50.86
Short Circuit Current (Isc)	14.32
Module Efficiency	22.48%

Pmax uncertainty value at STC is ±3%.

ELECTRICAL CHARACTERISTICS WITH DIFFERENT REAR SIDE POWER GAIN

Rear side Power Gain	5%	15%	25%
Maximum Power at STC (Pmax)	609	667	725
Optimum Operating Voltage (Vmp)	43.17	43.17	43.27
Optimum Operating Current (Imp)	14.27	15.63	16.99
Open Circuit Voltage (Voc)	50.76	50.76	50.86
Short Circuit Current (Isc)	15.04	16.47	17.90
Module Efficiency	23.60%	25.85%	28.10%

Certifications

- IEC 61215:2021
- IEC 61730:2016 Part 1 & 2
- IEC 62716:2013
- IEC 62804-1:2015
- IEC 61701:2020
- IEC 61853-1:2011
- IAM, LETID, IID